

Expanded Metal In-Ground Square Picnic Table

SKU CD-46SPT-IG

TOOLS NEEDED


Socket Wrench


1/2" Wrench
14 mm Wrench


1/2" Socket Bit
14 mm Socket Bit

PARTS


5/16" x 1"
Bolt x 24



5/16" Nut x 24

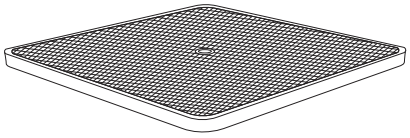

5/16" Washer x 48

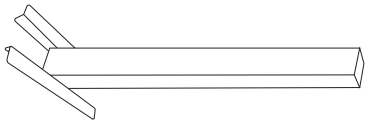

3/8" x 5" ⅕ Bolt x 8

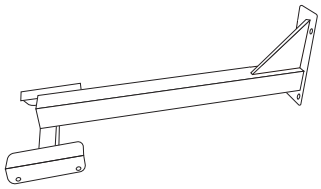

3/8" Nut x 8


3/8" Washer x 16

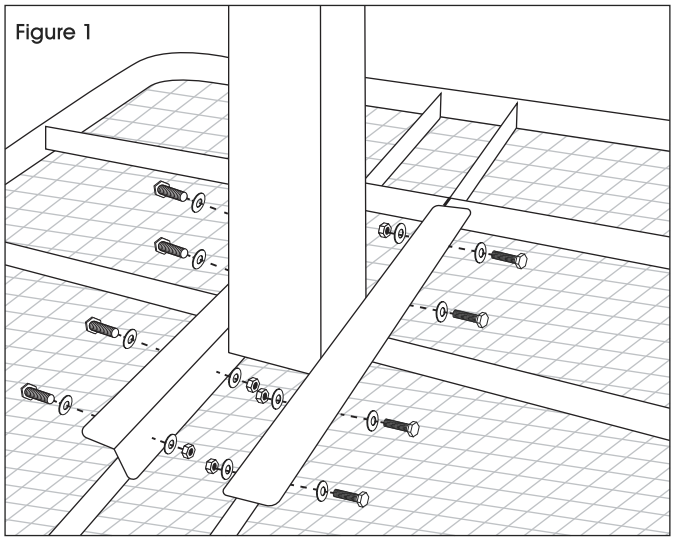

Bench Seat x 4


Tabletop x 1


Inground Mount Pole x 1

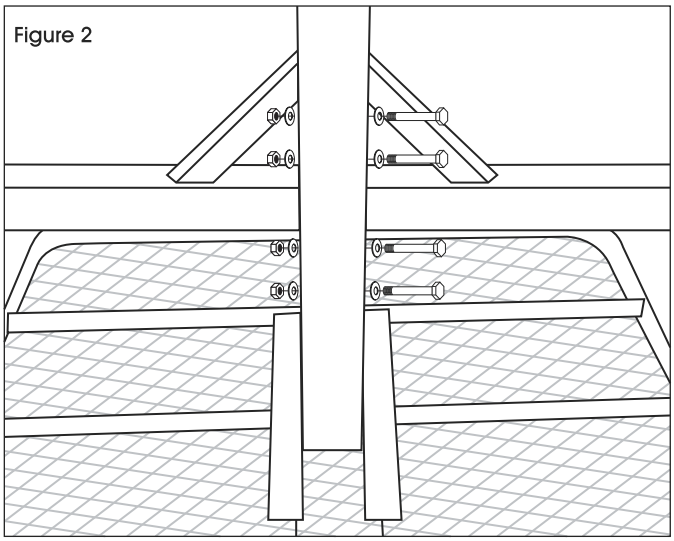

Bench Support Bracket x 4

ASSEMBLY


Figure 1

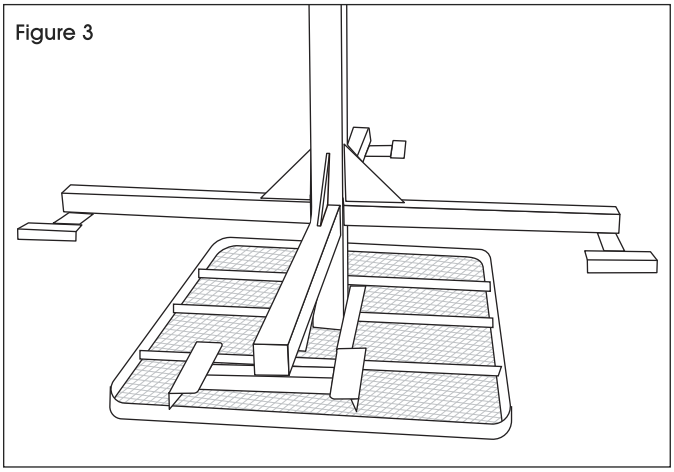
1. Verify all parts are present before beginning. Hardware is located in a white box.
2. Flip tabletop upside down. Attach inground mount pole to the tabletop using eight 5/16 x 1" bolts, sixteen 5/16" washers and eight 5/16" nuts. (See Figure 1)

Figure 2



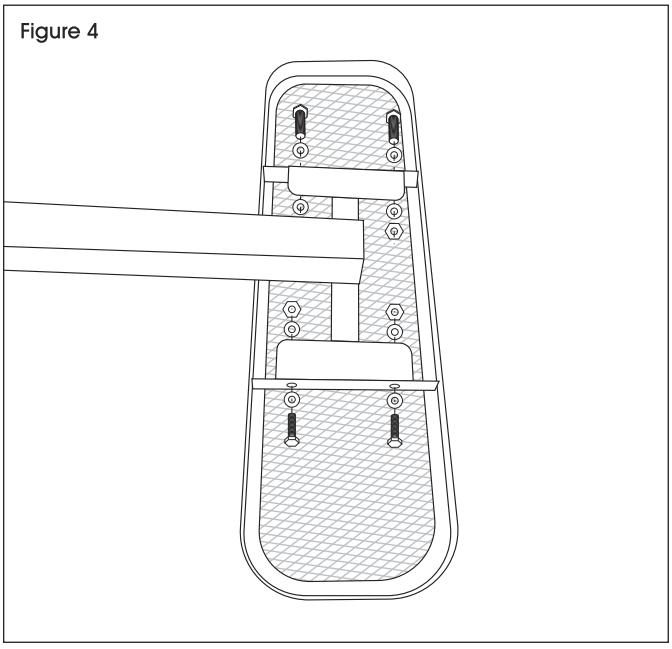
3. Attach two bench support brackets to inground mount pole using four 3/8 x 5"⅕ bolts, eight 3/8" washers and four 3/8" nuts. (See Figure 2)

Figure 3



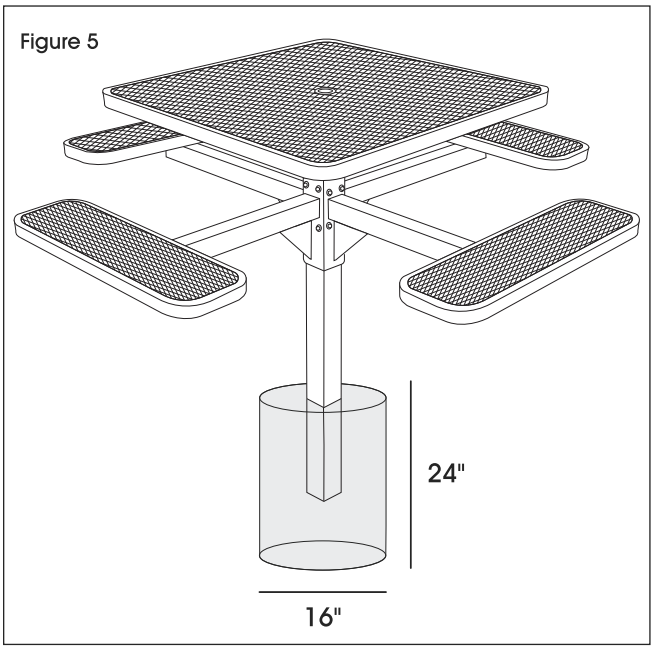
4. Repeat step three with remaining two bench support brackets. (See Figure 3)

Figure 4



5. Attach bench to the bench support brackets using four 5/16 x 1" bolts, four 5/16" nuts and eight 5/16" washers on each. Repeat for remaining three bench seats. Ensure all bolts are fully tightened. (See Figure 4)

Figure 5



6. Dig a hole approximately 24" deep and 16" wide. (See Figure 5)

NOTE: The size of the footing is only a suggestion. Local soil conditions will determine the necessary size.

7. Fill the bottom of hole with 3-4" of gravel ensuring when the table is placed in the hole the top of the bench seat is 18" above the ground.

8. Put table into hole and ensure that it is level. Pour premixed concrete into the hole. Use 2 x 4" boards to steady the table until the concrete hardens.